

### ■ Features


- · Constant Current mode output
- · Plastic housing with Class II design
- · Built-in active PFC function
- · Class 2 power unit
- IP67 rating for indoor or outdoor installations
- Function: 3 in 1 dimming
- Typical lifetime>50000 hours
- 5 years warranty

# ■ Applications

- · LED panel lighting
- · LED downlight
- · LED decorative lighting
- · LED tunnel lighting
- Moving sign

#### Description

## ■ Model Encoding



# 25W Constant Current Mode LED Driver

# LPF-25D series


# **SPECIFICATION**

MODEL		LPF-25D-12	LPF-25D-15	LPF-25D-20	LPF-25D-24	LPF-25D-30	LPF-25D-36	LPF-25D-42	LPF-25D-48	LPF-25D-54
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
OUTPUT	RATED CURRENT	2.1A	1.67A	1.25A	1.05A	0.84A	0.7A	0.6A	0.53A	0.47A
	RATED POWER Note.5	25.2W	25.05W	25W	25.2W	25.2W	25.2W	25.2W	25.44W	25.38W
	CONSTANT CURRENT REGION Note.2	6.6 ~12V	8.25 ~ 15V	11 ~ 20V	13.2 ~ 24V	16.5 ~ 30V	19.8 ~ 36V	23.1 ~ 42V	26.4 ~ 48V	29.7 ~ 54V
	CURRENT RIPPLE	5.0% max. @rated current								
	CURRENT TOLERANCE	±5.0%								
	SETUP, RISE TIME Note.6	1500ms, 80ms / 115VAC 500ms, 80ms / 230VAC								
	HOLD UP TIME (Typ.)	16ms/230VAC 16ms/115VAC								
INPUT	VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)								
	FREQUENCY RANGE	47 ~ 63Hz								
	POWER FACTOR	$ PF \ge 0.97/115 VAC, PF \ge 0.95/230 VAC, PF \ge 0.92/277 VAC@full load \\ (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section) $								
	TOTAL HARMONIC DISTORTION	THD< 20%(@load≧60%/115VC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)								
	EFFICIENCY (Typ.)	84%	84%	85%	85.5%	85.5%	85.5%	85.5%	86%	86%
	AC CURRENT	0.4A / 115VA	0.25A/	230VAC 0	.2A/277VAC					
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=200µs measured at 50% Ipeak) at 230VAC; Per NEMA 410								
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	12 units (circuit breaker of type B) / 21 units (circuit breaker of type C) at 230VAC								
	LEAKAGE CURRENT	<0.75mA/240VAC								
PROTECTION	OVER CURRENT	95 ~ 108%								
		Constant current limiting, recovers automatically after fault condition is removed								
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed.								
	OHORY ORGOTI	15 ~ 18V	17.5 ~ 21V	23 ~ 27V	28 ~ 35V	34 ~ 40V	41 ~ 49V	46 ~ 54V	54 ~ 63V	59 ~ 66V
	OVER VOLTAGE					<u> </u>	T1 T0V	10 011	04 00V	00 000
	OVER TEMPERATURE	Shut down and latch off o/p voltage, re-power on to recover  Shut down o/p voltage, recovers automatically after temperature goes down								
	WORKING TEMP.	Tcase=-35 ~ +70°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)								
ENVIRONMENT	MAX. CASE TEMP.	Tcase=+70°C								
		20 ~ 95% RH non-condensing								
	WORKING HUMIDITY	·								
	STORAGE TEMP., HUMIDITY TEMP. COEFFICIENT	-40 ~ +80°C, 10 ~ 95% RH								
		±0.03%/°C (0~50°C)								
SAFETY & EMC	SAFETY STANDARDS Note.8	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes  UL8750, CSA C22.2 No. 250.0-08,ENEC EN61347-1, EN61347-2-13 independent, EN62384,J61347-1, J61347-2-13, IP67 approved ;Design refer to UL60950-1, TUV EN60950-1								
	WITHSTAND VOLTAGE	1/P-O/P:3.75KVAC								
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH								
	EMC EMISSION Note.8	TP0/P: 100M Offins / 300 / DC / 25 C / 70% RH  Compliance to EN55015, EN61000-3-2 Class C (@load ≧ 55%) ; EN61000-3-3								
		Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, light industry level (surge immunity Line-Line 2KV)								
	MTBF	1190.8K hrs min. Telcordia SR-332 (Bellcore); 418.5Khrs min. MIL-HDBK-217F (25°C)								
OTHERS		148*40*32mm (L*W*H)								
	DIMENSION			CLIET						
	PACKING	0.36Kg; 40pcs/15.4Kg/1.02CUFT								
NOTE	<ol> <li>All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.</li> <li>Please refer to "DRIVING METHODS OF LED MODULE".</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 uf &amp; 47uf parallel capacitor.</li> <li>Tolerance: includes set up tolerance, line regulation and load regulation.</li> <li>De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.</li> <li>Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.</li> <li>The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</li> <li>The model certified for CCC(GB19510.14, GB19510.1, GB17743 and GB17625.1) is an optional model. Please contact MEAN WELL for details.</li> <li>To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains.</li> <li>This series meets the typical life expectancy of &gt;50,000 hours of operation when Tcase, particularly (c) point (or TMP, per DLC), is about 70°C or less.</li> <li>Please refer to the warranty statement on MEAN WELL's website at <a href="http://www.meanwell.com">http://www.meanwell.com</a></li> </ol>									




## ■ BLOCK DIAGRAM

fosc: 100KHz

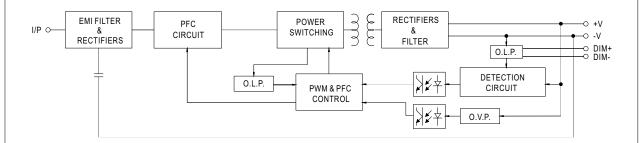

### ■ DRIVING METHODS OF LED MODULE

💥 This series works in constant current mode to directly drive the LEDs.



Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.


Should there be any compatibility issues, please contact MEAN WELL.



#### **■** DIMMING OPERATION




- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
   1 ~ 10VDC, or 10V PWM signal or resistance.
- $\bullet \ \, \text{Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers. }$
- Dimming source current from power supply: 100µA (typ.)
- O Applying additive 1 ~ 10VDC




"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):





"DO NOT connect "DIM- to -V"


Applying additive resistance:



"DO NOT connect "DIM- to -V"











Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

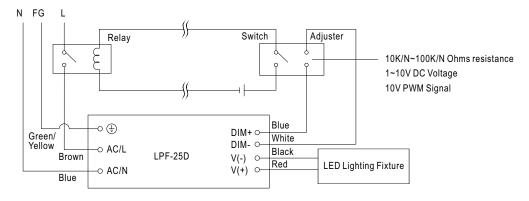


Using a switch and relay can turn ON/OFF the lighting fixture.



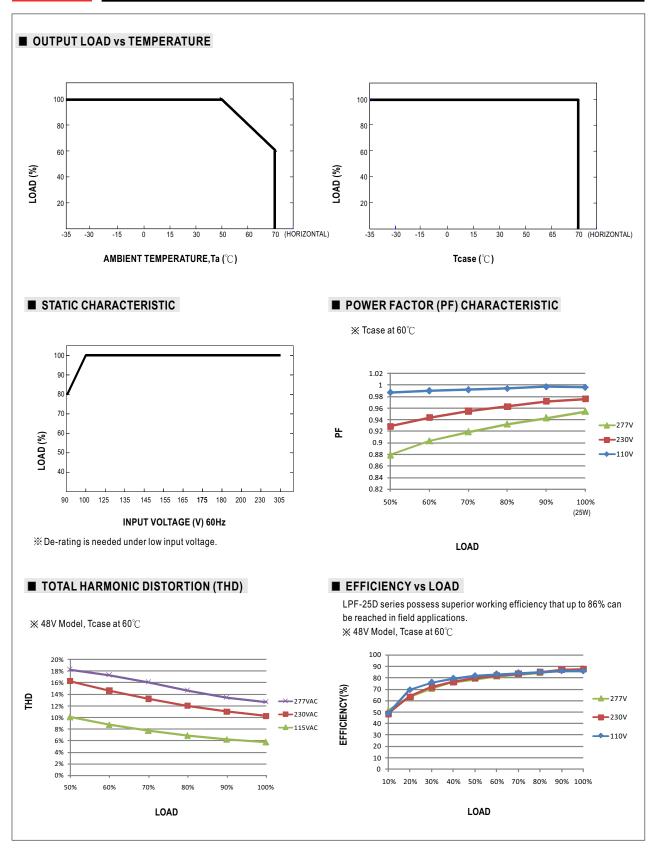






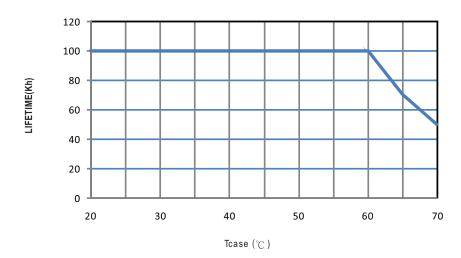



# ■ MECHANICAL SPECIFICATION

CASE NO.: LPF-16A Unit:mm

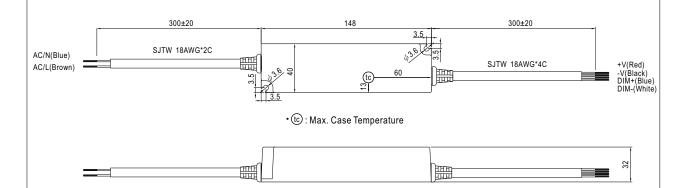

### ■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/webnet/search/InstallationSearch.html